
HOUSE OF
bespoke

# FLOOR

## NATURAL STONE - ALL FORMATS

Technical Specification Guide

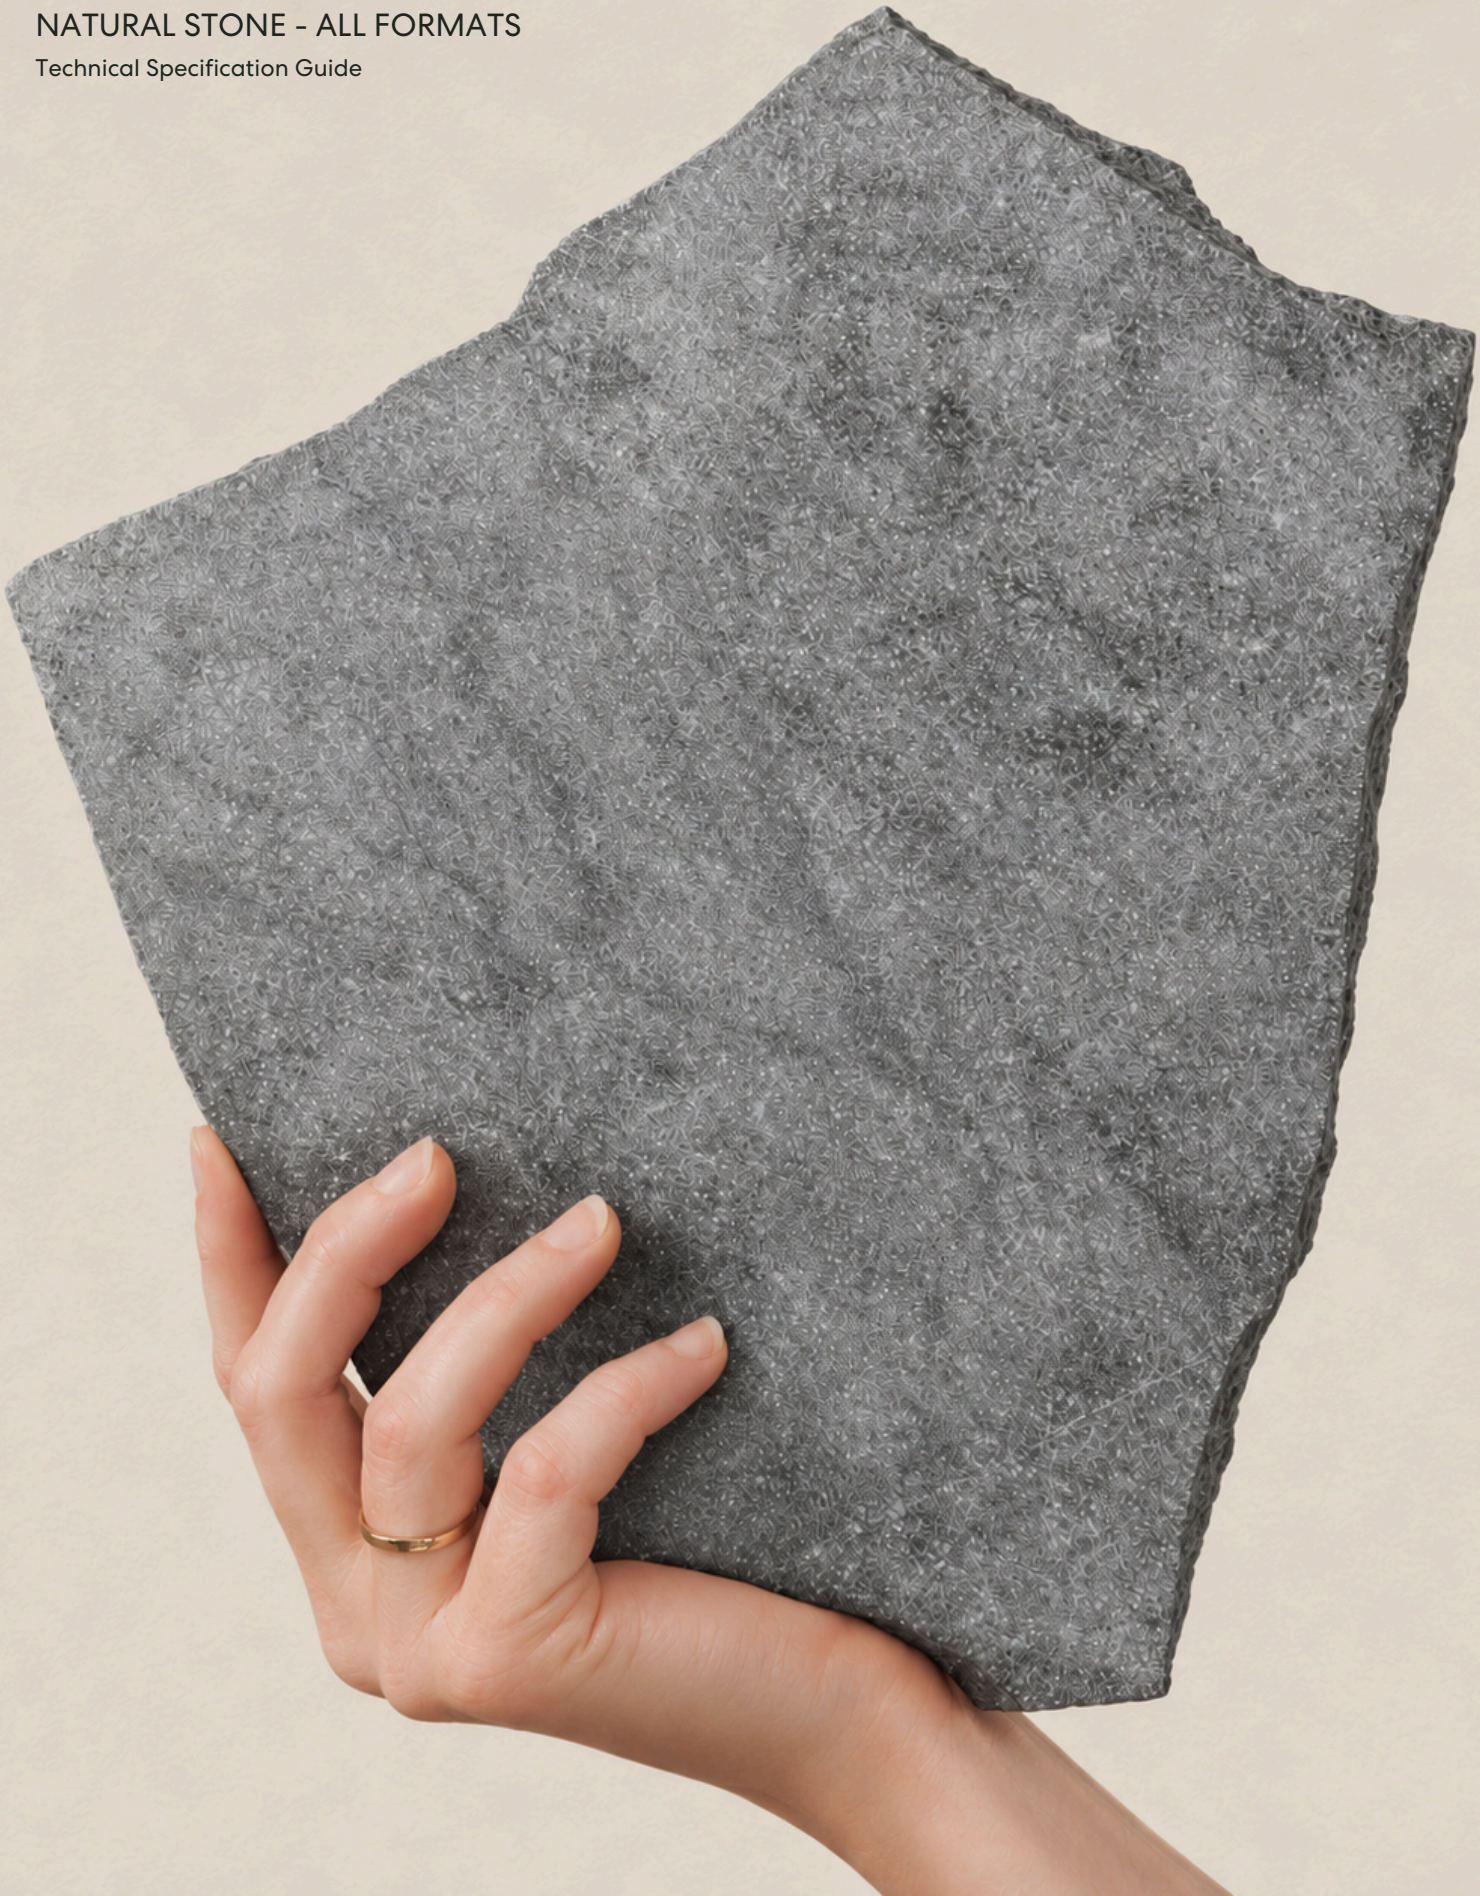

# Table of Contents


Introduction ..... 4-5
Product Reference Images (By Format) ..... 6-23
Natural Stone Pavers & Tiles ..... 6-9
Limestone 6-7
Marble 7-8
Travertine 8
Granite 9
Bluestone 9
Stone Crazy Paving ..... 10-12
20mm Crazy Paving 10-11
Split Crazy Paving 11-12
Cobblestones ..... 13-17
Uniform Mesh Cobblestones 13-14
Split Mesh Cobblestones 14-15
Uniform Loose Cobblestones 15-16
Split Loose Cobblestones 16-17
Stepping Stones ..... 18-21
Circular Stepping Stones 18
Organic Stepping Stones 18-19
Rectangular Stepping Stones 19-21
Stone Step Treads ..... 22-23
Format & Pattern Reference Images ..... 24-27
Key Considerations ..... 28
Technical Details (By Material) ..... 29-50
Limestone ..... 29-34
Hiekka 29
Kahvi 29-30
Matala 30
Montera 31
Olive 31-32
Platina 32-33
Ranta 33
Sokeria 33-34
Marble ..... 35-38
Argento 35
Escura 35-36
Harmaa 36
Pantera 37
Tempest 37-38

# Table of Contents


Valas 38

**Travertine** ..... **39-41**

Alentaa 39

Premium Silver 39-40

Valo 40-41

**Granite** ..... **42-44**

Aalto 42

Highland Grey 42-43

Raven 43-44

Sable 44

**Bluestone** ..... **45**

Bluestone 45

Virtaava 45

**Other** ..... **46-51**

Porphyry 46

Porphyry 46

Natural Quartzite 47-49

Acero 47

Calor 47

Heritage 47

Kaldur 47

Kuro 48

Montreux 48

Pilvi 48

Plume 48

Vari 49

Slate 50

Arkkia 50

Aska 50

Terracotta 51

Kotta 51

Seamles Texture Design Files ..... 52-54

# Forged by Nature, Crafted by Hand

House of Bespoke's natural stone flooring collection is a celebration of the rich diversity found in marble, granite, travertine, bluestone, and limestone. Sourced globally and warehoused locally, each stone tells its own story through veining, fossilisation, and natural tonal variation that make every piece unique.

Available in a range of finishes and profiles, including single piece drop edges, the collection spans pavers, tiles, crazy paving, cobbles, steppers, and treads in a variety of dimensions and patterns to suit different design requirements. Crafted to bring lasting character to outdoor spaces, we supply projects across New Zealand, the Cook Islands and the wider Pacific. Samples are available to support your selection.

This document outlines the technical specifications for the range. For further detail or custom requirements, our team is ready to assist.



French Pattern Pavers & Uniform Loose Cobblestones
*Kahvi Limestone*




Pavers (30mm thick) & Tiles (20mm thick)
*Olive Limestone*



Crazy Paving (20mm & Split)
*Arkkia Slate*



Split Mesh Cobblestones
*Pilvi Natural Quartzite*

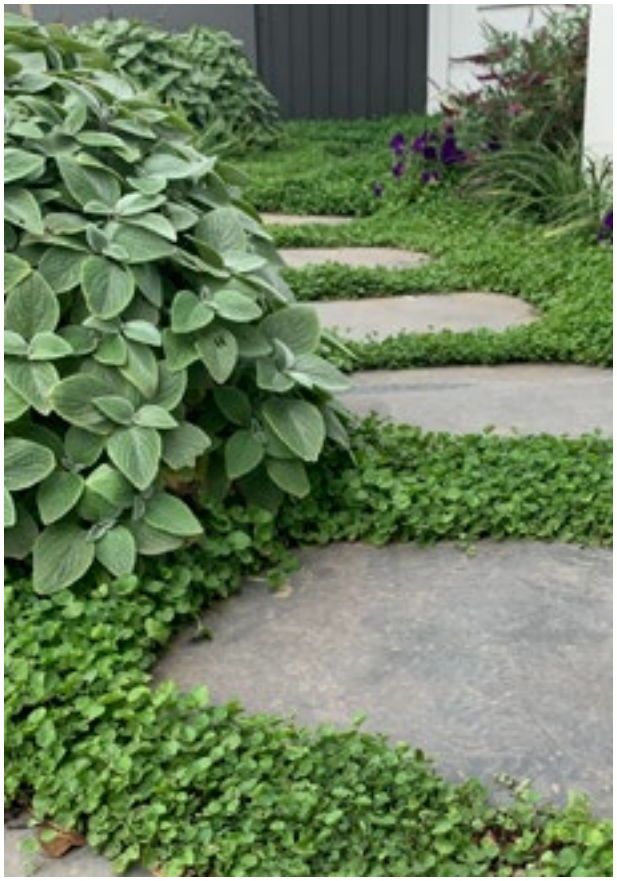

Organic Stepping Stones
*Bluestone*

# Natural Stone - Pavers & Tiles

## LIMESTONE



HIEKKA



KAHVI



MATALA



MONTERA



OLIVE



PLATINA

# Natural Stone - Pavers & Tiles

## LIMESTONE (Continued)




RANTA



SOKERIA

## MARBLE

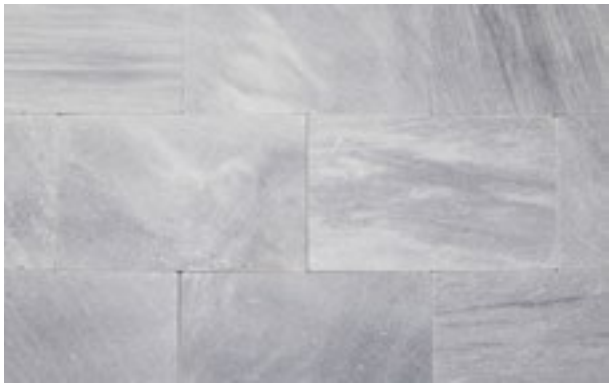

ARGENTO



ESCURA



HARMAA



PANTERA

# Natural Stone - Pavers & Tiles

## MARBLE (Continued)



TEMPEST



VALAS

## TRAVERTINE



ALENTAA



PREMIUM SILVER



VALO

# Natural Stone - Pavers & Tiles

## GRANITE



AALTO



HIGHLAND GREY



RAVEN

## BLUESTONE



VIRTAAVA

# Stone Crazy Paving

## 20mm CRAZY PAVING



BLUESTONE (Bluestone)



HARMAA (Marble)



KAHVI (Limestone)



MONTERA (Limestone)



OLIVE (Limestone)



PANTERA (Marble)

# Stone Crazy Paving

## 20mm CRAZY PAVING (Continued)



RANTA (Limestone)



SOKERIA (Limestone)



VALAS (Marble)

## SPLIT CRAZY PAVING




ARKKIA (*Other* - Slate)



CALOR (*Other* - Natural Quartzite)

# Stone Crazy Paving

## SPLIT CRAZY PAVING (continued)

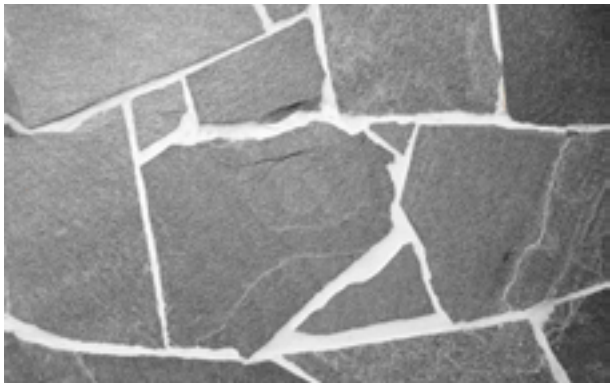

KALDUR (*Other* - Natural Quartzite)



KURO (*Other* - Natural Quartzite)



PORPHYRY (*Other* - Porphyry)

# Cobblestones

## UNIFORM MESH COBBLESTONES



ESCURA (Marble)




HARMAA (Marble)



HIGHLAND GREY (Granite)



PANTERA (Marble)

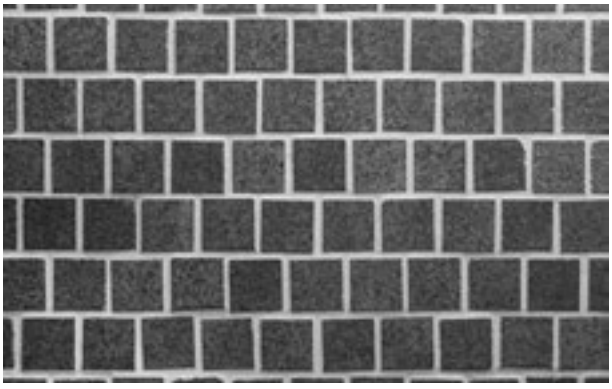

RAVEN (Granite)



SABLE (Granite)


# Cobblestones

## UNIFORM MESH COBBLESTONES (Continued)



VALAS (Marble)


## SPLIT MESH COBBLESTONES

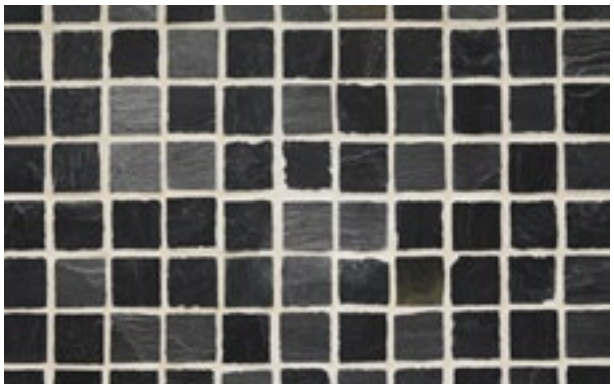

ASKA (*Other* - Slate)



HERITAGE (*Other* - Natural Quartzite)

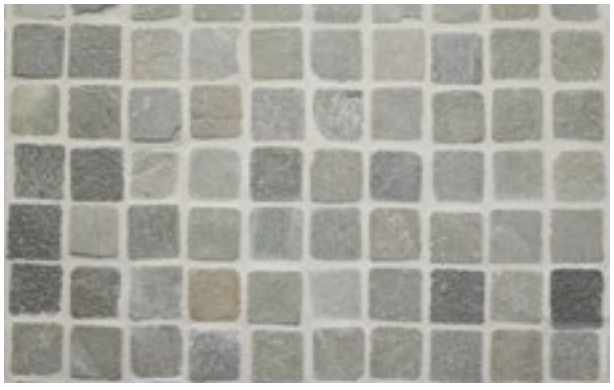

MONTREUX (*Other* - Natural Quartzite)



PILVI (*Other* - Natural Quartzite)

# Cobblestones

## SPLIT MESH COBBLESTONES (Continued)



PLUME (*Other* - Natural Quartzite)



VARI (*Other* - Natural Quartzite)

## UNIFORM LOOSE COBBLESTONES



KAHVI (Limestone)



KOTTA (Terracotta)




OLIVE (Limestone)



PANTERA (Marble)

# Cobblestones

## UNIFORM LOOSE COBBLESTONES (Continued)

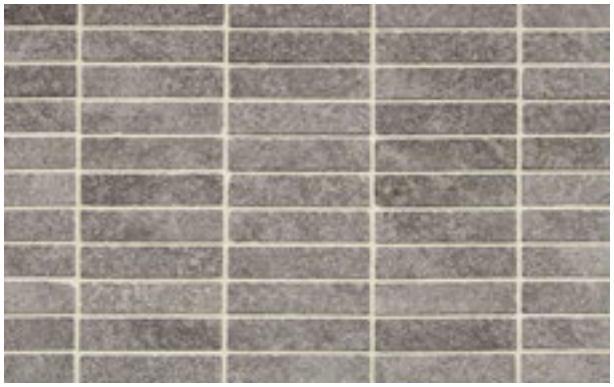

PLATINA (Limestone)



SOKERIA (Limestone)



VALAS (Marble)

## SPLIT LOOSE COBBLESTONES



ACERO (*Other* - Natural Quartzite)



ARKKIA - Cube (*Other* - Slate)

# Cobblestones

## SPLIT LOOSE COBBLESTONES (Continued)



ARKKIA - Filetti (*Other* - Slate)



PORPHYRY - Cube (*Other* - Porphyry)



PORPHYRY - Filetti (*Other* - Porphyry)

# Stepping Stones

## CIRCULAR STEPPING STONES



HIGHLAND GREY (Granite)



MATALA (Limestone)



RAVEN (Granite)

## ORGANIC STEPPING STONES



ALENTAA (Travertine)



BLUESTONE (Bluestone)

# Stepping Stones

## ORGANIC STEPPING STONES (Continued)



KAHVI (Limestone)



OLIVE (Limestone)



SOKERIA (Limestone)

## RECTANGULAR STEPPING STONES



ESCURA (Marble)



HIEKKA (Limestone)

# Stepping Stones

## RECTANGULAR STEPPING STONES (Continued)



HIGHLAND GREY (Granite)



KAHVI (Limestone)



MATALA (Limestone)



PLATINA (Limestone)



RAVEN (Granite)



TEMPEST (Marble)

# Stepping Stones

## RECTANGULAR STEPPING STONES (Continued)



VIRTAAVA (Bluestone)

# Stone Step Treads



HIGHLAND GREY (Granite)



KAHVI (Limestone)



MATALA (Limestone)



PREMIUM SILVER (Travertine)



RAVEN (Granite)



VALO (Travertine)

# Stone Step Treads



VIRTAAVA (Bluestone)

# Formats & Patterns

## PAVERS & TILES



**Tile Formats**
Up to 20mm thickness, within tolerance

**Paver Formats**
30mm thickness and above, within tolerance

## MODULAR & IRREGULAR



Crazy Paving



French Pattern

Standard French Pattern (Half Set)

| Pieces | Size |
|---|---|
| 1 | A. 600x400mm |
| 2 | B. 400x400mm |
| 1 | C. 400x200mm |
| 2 | D. 200x200mm |


Large Modular Pattern (Half Set)

| Pieces | Size |
|---|---|
| 1 | A. 900x600mm |
| 2 | B. 600x600mm |
| 1 | C. 600x300mm |
| 2 | D. 300x300mm |

# Formats & Patterns

## COBBLESTONES

### Mesh - Uniform & Split



Brickbond




Straightbond

### Uniform Loose




Herringbone



Brick




Cube



Elongated Brick

### Split Loose




Cube



Fan




Filetti




Raw

# Formats & Patterns

## STEPPING STONES




Circular Stepper (Medium)



Circular Stepper (Large)



Organic Stepper (Medium)

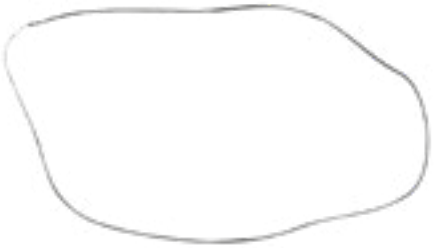

Organic Stepper (Large)



Rectangular Stepper

# Formats & Patterns

## STEP TREADS, COPING, REBATES & PROFILES



Step Tread (Bullnose Profile)



Step Tread (Pencil Edge Profile)



Coping



Rebate (Drop Edge)



Bullnose



Pencil Round



Rebated Profile

# Working with Natural Stone: Key Considerations

## NATURAL VARIATION

All our natural stone products display natural variation, which is part of their beauty and individuality. Each piece will differ slightly in colour, tone, and texture, giving every project a unique character. The images and displays shown on our website and in this guide are indicative only and serve as a general guide to the overall look of the product. Because natural stone is formed by nature, no two pieces are identical. Clients seeking a uniform and consistent appearance should consider porcelain alternatives, as they are manufactured for a more controlled finish.

## NATURAL IMPERFECTIONS AND INSTALLATION ALLOWANCE

Natural stone and hand-finished products often display variations and imperfections that form part of their inherent character. During production, handling, and packing, some pieces may show rougher edges, heavier chipping, or stronger colour variation than others—particularly in tumbled, split-face, or cobblestone formats. Products such as **travertine** may feature natural holes, and some pieces can have a higher number or slightly larger cavities than others. Similarly, **limestone and marble** may contain visible fossils, with some pieces showing a heavier concentration of fossil patterns. These natural traits are expected and contribute to the authenticity of the material. During installation, installers should set aside any pieces with more noticeable irregularities for cutting or wastage, and it is recommended to include an appropriate wastage allowance when ordering to ensure full coverage and a consistent final appearance.

## DRYING TIME AFTER INSTALLATION

Natural stone products may take several days or even weeks to fully dry after installation, depending on the product's density, porosity, and the surrounding weather conditions. It is important to allow adequate drying time before assessing the final colour tone, appearance, or overall finish, as the stone's true characteristics become visible only once it has completely dried.

## QUARTZ DEPOSITS AND VEINING

All natural stone products may occasionally contain **quartz deposits** or **quartz lines**, which are naturally formed during the stone's creation. These lines are actually **natural veins**, not structural cracks, and are a normal characteristic of genuine stone. Because natural stone develops over thousands of years through mineral movement and pressure, visible quartz veins and variations are expected and contribute to its authentic charm. Products such as **Montera Limestone** often display more frequent quartz deposits and natural pebble-like inclusions, which enhance their unique appearance and make each piece distinctively attractive.

## NATURALLY OCCURRING IRON CONTENT

All natural stone products contain varying levels of minerals, including **iron**, which is a naturally occurring component within the stone's composition. From piece to piece, some stones may display visible iron deposits that can occasionally react with moisture and the environment, forming slight rust-like markings. This is a normal and expected characteristic of genuine stone. Products such as **Kahvi** and **Platina Limestones** may occasionally feature small pieces with faint rust tones caused by this natural process. Similarly, **Bluestone** generally contains higher iron content than other stones, and over time, some pieces may gradually develop subtle brownish tones as a result. These variations add authenticity and natural character to the stone. If desired, suitable cleaning solutions are available from House of Bespoke to help remove or lighten any visible iron marks.

## PENCIL ROUND & FULL PIECE DROP EDGE PROFILES FOR TUMBLED STONE

When creating **Pencil Round Profiles** or **Full Piece Drop Edges** on tumbled materials, the tumbled character of the stone may remain partially visible along the profiled edges and corners. These softened edges, subtle irregularities, and natural textures are an inherent part of tumbling process and are completely expected. They contribute to the authentic, aged appearance that makes tumbled finishes unique and desirable.

*Note: All above listed characteristics of natural stone are inherent to the material's natural formation and are not considered defects.*

# Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## HIEKKA - Sandblasted Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 105 | 15.4 | 0.25 | 2.16 | 0.91 | 2.02 | | 60.4 / 37.1 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 800x400x20mm | P5 | 52kg/m² | 16m² | Sawn | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 800x400x30mm | P5 | 25kg each | 33Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Rectangular 800x400x30mm | P5 | 25kg each | 33Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |

## KAHVI - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 105 | 15.4 | 0.25 | 2.16 | 0.91 | 2.02 | 102 / 41.6 | 43.66 / 31.27 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 400x400x30mm | P4 | 77kg/m² | 10.56m² | Antique | +/- 2mm | +/- 2mm |
| 600x400x30mm | P4 | 77kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |
| 600x600x30mm | P4 | 77kg/m² | 11.88m² | Antique | +/- 2mm | +/- 2mm |
| 600x400x13mm | P4 | 34kg/m² | 36m² | Antique | +/- 2mm | +/- 2mm |
| 400x400x13mm | P4 | 34kg/m² | 24m² | Antique | +/- 2mm | +/- 2mm |
| 800x400x20mm | P4 | 51kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 400x400x30mm | P4 | 13kg each | 66Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 600x400x30mm | P4 | 19kg each | 66Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 600x600x30mm | P4 | 28kg each | 32Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 800x400x30mm | P4 | 22kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 600x400x30/75mm | P4 | 21kg each | 36Pcs | Rebate | +/- 2mm | +/- 2mm |
| Rebated 800x400x20/55mm | P4 | 18kg each | 24Pcs | Rebate | +/- 2mm | +/- 2mm |

# Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## KAHVI - Antique Finish (Continued)

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance Dimension | Size Tolerance Thickness |
|---|---|---|---|---|---|---|
| **Modular & Irregular** | | | | | | |
| French Pattern 30mm | P4 | 77kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |
| French Pattern 13mm | P4 | 34kg/m² | 34.56m² | Antique | +/- 2mm | +/- 2mm |
| Crazy Paving 20mm | P4 | 56kg/m² | 20m² | Antique | n/a | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P4 | 82kg/m² | 10.24m² | Antique | +/- 2mm | +/- 2mm |
| Uniform Loose 200x50x20mm | P4 | 76.5kg/m² | 25.2m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Organic - Medium ~600mmx600mmx30mm | P4 | ~30kg each | 33Pcs | Split | +/- 100mm | +/- 2mm |
| Organic - Large ~900mmx500mmx30mm | P4 | ~45kg each | 27Pcs | Split | +/- 100mm | +/- 2mm |
| Rectangular 800x400x30mm | P4 | 23kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Step Tread 1210x400x30mm | P4 | 38kg each | 25Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

## MATALA - Sandblasted Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 117 | 13.9 | | 3.18 | 2.13 | 3.45 | | 53.35 / 37.3 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance Dimension | Size Tolerance Thickness |
|---|---|---|---|---|---|---|
| **Pavers & Tiles** | | | | | | |
| 800x400x20mm | P5 | 54kg/m² | 16m² | Sawn | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 800x400x30mm | P5 | 25kg each | 66Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 800x400x20/60mm | P5 | 19.45g each | 32Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Circular - Medium Ø 600x30mm | P5 | 25kg each | 40Pcs | Sawn | +/- 2mm | +/- 2mm |
| Circular - Large Ø 800x30mm | P5 | 44kg each | 25Pcs | Sawn | +/- 2mm | +/- 2mm |
| Rectangular 800x400x30mm | P5 | 25kg each | 33Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| Step Tread 1210x400x30mm | P5 | 39kg each | 20Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |

# Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## MONTERA - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 55 | 11 | | 2.21 | 2.50 | 5.50 | | 39.21 / 24.05 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance Dimension | Size Tolerance Thickness |
|---|---|---|---|---|---|---|
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 78kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |
| 800x400x20mm | P5 | 52kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| 600x400x20mm | P5 | 52kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P5 | 19kg each | 66Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 800x400x30mm | P5 | 26kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| **Modular & Irregular** | | | | | | |
| Crazy Paving 20mm | P5 | 52kg/m² | 20m² | Antique | n/a | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P5 | 82kg/m² | 12.24m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Rectangular 800x400x30mm | P5 | 25kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

## OLIVE - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 117 | 13.9 | | 3.18 | 2.13 | 3.45 | | 49.39 / 34.02 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance Dimension | Size Tolerance Thickness |
|---|---|---|---|---|---|---|
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 80kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |
| 600x400x10mm | P5 | 27kg/m² | 46.08m² | Antique | +/- 2mm | +/- 2mm |
| 800x400x20mm | P5 | 54kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P5 | 20kg each | 66Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 600x400x30/80mm | P5 | 24kg each | 32Pcs | Rebate | +/- 2mm | +/- 2mm |

# Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## OLIVE - Antique Finish (Continued)

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Copings (Continued)** | | | | | | |
| Rebated 800x400x20/60mm | P5 | 20kg each | 32Pcs | Rebate | +/- 2mm | +/- 2mm |
| 800x400x30mm | P5 | 25kg each | 33pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| **Modular & Irregular** | | | | | | |
| French Pattern 30mm | P5 | 80kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |
| French Pattern 10mm | P5 | 27kg/m² | 38.88m² | Antique | +/- 2mm | +/- 2mm |
| Crazy Paving 20mm | P5 | 56kg/m² | 20m² | Antique | na | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P5 | 82kg/m² | 14.4m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Organic - Medium ~600mmx600mmx30mm | P5 | ~30kg each | 33Pcs | Split | +/- 100mm | +/- 2mm |
| Organic - Large ~900mmx500mmx30mm | P5 | ~45kg each | 27Pcs | Split | +/- 100mm | +/- 2mm |
| Rectangular 800x400x30mm | P5 | 25kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

## PLATINA - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 66 | 6.33 | 0.22 | 3.64 | 1.34 | 2.00 | 106 / 40.80 | |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P4 | 78kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |
| 800x400x20mm | P4 | 52kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P4 | 19kg each | 66Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 600x400x30mm | P4 | 19kg each | 66Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 600x400x30/75mm | P4 | 22kg each | 36Pcs | Rebate | +/- 2mm | +/- 2mm |
| Rebated 800x400x20/55mm | P4 | 21kg each | 24Pcs | Rebate | +/- 2mm | +/- 2mm |
| 800x400x30mm | P4 | 26kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

# Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## PLATINA - Antique Finish (Continued)

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P4 | 82kg/m² | 10.24m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Rectangular 800x400x30mm | P4 | 26kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

## RANTA - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 55 | 11 | | 3.11 | 2.50 | 5.50 | | 38.22 / 24.21 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 900x400x20mm | P5 | 56kg/m² | 25.2m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 900x400x30mm | P5 | 28kg each | 40Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 900x400x20/60mm | P5 | 22kg each | 32Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Modular & Irregular** | | | | | | |
| Crazy Paving 20mm | P5 | 56kg/m² | 20m² | Antique | n/a | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P5 | 86kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Rectangular 900x400x30mm | P5 | 28kg each | 40Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

## SOKERIA - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 105 | 15.4 | 0.25 | 2.16 | 0.91 | 2.02 | 104 / 40.60 | 51.9 / 35.99 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 81kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |

# Limestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

| SOKERIA - Antique Finish (Continued) | | | | | | |
|---|---|---|---|---|---|---|
| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
| | | | | | Dimension | Thickness |
| **Pavers & Tiles (Continuted)** | | | | | | |
| 800x400x20mm | P5 | 51kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P5 | 20kg each | 66Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 800x400x30mm | P5 | 22kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| **Modular & Irregular** | | | | | | |
| Crazy Paving 20mm | P5 | 56kg/m² | 20m² | Antique | n/a | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P5 | 82kg/m² | 10.24m² | Antique | +/- 2mm | +/- 2mm |
| Uniform Loose 200x50x20mm | P5 | 76.5kg/m² | 25.2m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Organic Medium ~600mmx600mmx30mm | P5 | ~30kg each | 33Pcs | Split | +/- 100mm | +/- 2mm |
| Organic Large ~900mmx500mmx30mm | P5 | ~45kg each | 27Pcs | Split | +/- 100mm | +/- 2mm |
| Rectangular 800x400x30mm | P5 | 22.45kg each | 34Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

# Marble Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## ARGENTO- Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 56.00 | 14.00 | | <1 | 0.10 | 1.10 | | |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 400x400x30mm | P4 | 81kg/m² | 10.88m² | Antique | +/- 2mm | +/- 2mm |
| 600x400x30mm | P4 | 81kg/m² | 16.32m² | Antique | +/- 2mm | +/- 2mm |
| 400x400x15mm | P4 | 41kg/m² | 15.36m² | Antique | +/- 2mm | +/- 2mm |
| 600x400x15mm | P4 | 41kg/m² | 31.68m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 400x400x30mm | P4 | 13kg each | 68Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 600x400x30mm | P4 | 20kg each | 68Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 800x400x30mm | P4 | 27kg each | 34Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 600x400x30/80mm | P4 | 22kg each | 38Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Modular & Irregular** | | | | | | |
| French Pattern 30mm | P4 | 27kg each | 34Pcs | Antique | +/- 2mm | +/- 2mm |
| French Pattern 20mm | P4 | 39kg each | 25Pcs | Antique | +/- 2mm | +/- 2mm |

## ESCURA - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 52.00 | 14.00 | | <1 | 0.15 | 1.14 | | 47.42 / 32.69 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 86kg/m² | 16.32m² | Antique | +/- 2mm | +/- 2mm |
| 800x400x30mm | P5 | 56kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 800x400x30mm | P5 | 20kg each | 28Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| **Modular & Irregular** | | | | | | |
| Crazy Paving 20mm | P5 | 56kg/m² | 24.48m² | Antique | na | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P5 | 86kg/m² | 16.32m² | Antique | +/- 2mm | +/- 2mm |

# Marble Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## ESCURA - Antique Finish (Continued)

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones (Continued)** | | | | | | |
| Uniform Mesh Straightbond 90x90x20mm | P5 | 78kg/m² | 19.2m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Rectangular 800x400x30mm | P5 | 28.8kg each | 34Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Step Tread 1210x400x30mm | P5 | 38.2 kg each | 33Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |

## HARMAA - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 52.00 | 14.00 | | <1 | 0.15 | 1.14 | | 41.01 / 27.68 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 81kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |
| 800x400x20mm | P5 | 56kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P5 | 20kg each | 68Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 800x400x30mm | P5 | 29kg each | 34Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 600x400x30/80mm | P5 | 23kg each | 38Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Modular & Irregular** | | | | | | |
| Crazy Paving 20mm | P5 | 56kg/m² | 24.48m² | Antique | n/a | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P5 | 81kg/m² | 16.32m² | Antique | +/- 2mm | +/- 2mm |
| Uniform Mesh Straightbond 90x90x20mm | P5 | 78kg/m² | 19.2m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Rectangular 800x400x30mm | P5 | 28.8kg each | 34Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Step Tread 1210x400x30mm | P5 | 38.2 kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

# Marble Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## PANTERA - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 138.00 | 20.00 | | <1 | 0.10 | 0.10 | | 22.69 / 6.98 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 82kg/m² | 16.32m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P5 | 20kg each | 68Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 600x400x30/80mm | P5 | 21kg each | 38Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Modular & Irregular** | | | | | | |
| Crazy Paving 20mm | P5 | 58kg/m² | 24m² | Antique | n/a | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P5 | 82kg/m² | 16.32m² | Antique | +/- 2mm | +/- 2mm |
| Uniform Mesh Straightbond 90x90x20mm | P5 | 78kg/m² | 19.2m² | Antique | +/- 2mm | +/- 2mm |

## TEMPEST - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 109.00 | 14.51 | | <1 | 0.05 | 0.18 | | 46.66 / 28.69 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 83kg/m² | 15.84m² | Antique | +/- 2mm | +/- 2mm |
| 800x400x20mm | P5 | 55kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P5 | 19kg each | 66Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 800x400x30mm | P5 | 27kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 600x400x30/80mm | P5 | 22kg each | 48Pcs | Rebate | +/- 2mm | +/- 2mm |
| Rebated 800x400x20/60mm | P5 | 20kg each | 64Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Rectangular 800x400x30mm | P5 | 28.8kg each | 34Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

# Marble Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

| TEMPEST - Antique Finish (Continued) | | | | | | | |
|---|---|---|---|---|---|---|---|
| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | | |
| | | | | | Dimension | Thickness | |
| **Stepping Stones & Treads (Continued)** | | | | | | | |
| Step Tread 1210x400x30mm | P5 | 38kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm | |

| VALAS - Antique Finish | | | | | | | |
|---|---|---|---|---|---|---|---|
| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
| 52.00 | 14.00 | | <1 | 0.15 | 1.14 | | 43.76 / 26.02 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 80kg/m² | 16.32m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 400x400x30mm | P5 | 13kg each | 68Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| 600x400x30mm | P5 | 19kg each | 68Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| Rebated 600x400x30/80mm | P5 | 22kg each | 38Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Modular & Irregular** | | | | | | |
| Crazy Paving 20mm | P5 | 58kg/m² | 24m² | Antique | n/a | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Loose 200x50x30mm | P5 | 79.5kg/m² | 16.32m² | Antique | +/- 2mm | +/- 2mm |
| Uniform Mesh Straightbond 90x90x20mm | P5 | 78kg/m² | 19.2m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Organic Medium ~600mmx600mmx30mm | P5 | ~22kg each | 30Pcs | Split | +/- 100mm | +/- 2mm |
| Organic Large ~900mmx500mmx30mm | P5 | ~43kg each | 20Pcs | Split | +/- 100mm | +/- 2mm |
| Step Tread 1210x400x30mm | P5 | 38.2 kg each | 33Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |

# Travertine Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## ALENTAA - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 85.27 | 11.30 | | <1 | 0.93 | 3.00 | | 69.72 / 54.85 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x11mm | P5 | 32.4kg/m² | 38.4m² | Antique | +/- 2mm | +/- 2mm |
| 600x400x30mm | P5 | 20.31kg/m² | 15.8m² | Antique | +/- 2mm | +/- 2mm |
| 800x400x20mm | P5 | 56kg/m² | 16m² | Antique | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P5 | 20.3kg each | 66Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |
| *Rebated 600x406x30/80mm | P5 | 27kg each | 36Pcs | Rebate | +/- 2mm | +/- 2mm |
| *Rebated 800x400x20/60mm | P5 | 26kg each | 24Pcs | Rebate | +/- 2mm | +/- 2mm |
| | | | | | *Rebate has sawn finish on the drop face* | |
| **Modular & Irregular** | | | | | | |
| Crazy Paving 20mm | P5 | 56kg/m² | 20m² | Antique | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Organic - Medium ~600mmx600mmx30mm | P5 | ~30kg each | 33Pcs | Split | +/- 100mm | +/- 100mm |
| Organic - Large ~900mmx500mmx30mm | P5 | ~45kg each | 27Pcs | Split | +/- 100mm | +/- 100mm |
| Rectangular 800x400x30mm | P5 | 23kg each | 33Pcs | Antique (Profiles Available) | +/- 2mm | +/- 2mm |

## PREMIUM SILVER TRAVERTINE - Tumbled Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 79.00 | 10.40 | | <1 | 0.67 | 2.10 | | 36.66 / 24.31 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 406x406x12mm | P3 | 30kg/m² | 26.37m² | Tumbled | +/- 2mm | +/- 2mm |
| 610x406x12mm | P3 | 30kg/m² | 39.63m² | Tumbled | +/- 2mm | +/- 2mm |
| 406x406x30mm | P3 | 74kg/m² | 10.88m² | Tumbled | +/- 2mm | +/- 2mm |
| 610x406x30mm | P3 | 74kg/m² | 16.35m² | Tumbled | +/- 2mm | +/- 2mm |

# Travertine Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## PREMIUM SILVER TRAVERTINE - Tumbled Finish (Continued)

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Copings** | | | | | | |
| 406x406x30mm | P3 | 13kg each | 68Pcs | Tumbled (Profiles Available) | +/- 2mm | +/- 2mm |
| 610x406x30mm | P3 | 18kg each | 68Pcs | Tumbled (Profiles Available) | +/- 2mm | +/- 2mm |
| *Rebated 610x406x30/60mm | P3 | 22kg each | 48Pcs | Rebate | +/- 2mm | +/- 2mm |
| *Rebated 610x406x30/80mm | P3 | 23kg each | 48Pcs | Rebate | +/- 2mm | +/- 2mm |
| | | | | | *Rebate has sawn finish on the drop face* | |
| **Modular & Irregular** | | | | | | |
| French Pattern 30mm | P3 | 75kg/m² | 16.35m² | Tumbled | +/- 2mm | +/- 2mm |
| French Pattern 12mm | P3 | 30kg/m² | 38.59m² | Tumbled | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| **Step Tread 1220x406x30mm | P3 | 36.16kg each | 33Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| | | | | | ***1220 long steps have honed and unfilled finish on top and surface* | |

## VALO - Tumbled Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 85.27 | 11.30 | | <1 | 0.93 | 3.00 | | 45.91 / 39.95 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 406x406x30mm | P3 | 78kg/m² | 10.56m² | Tumbled | +/- 2mm | +/- 2mm |
| 610x406x30mm | P3 | 78kg/m² | 15.84m² | Tumbled | +/- 2mm | +/- 2mm |
| 406x406x12mm | P3 | 31kg/m² | 25.60m² | Tumbled | +/- 2mm | +/- 2mm |
| 610x406x12mm | P3 | 31kg/m² | 38.40m² | Tumbled | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 406x406x30mm | P3 | 12kg each | 66Pcs | Tumbled (Profiles Available) | +/- 2mm | +/- 2mm |
| 610x406x30mm | P3 | 18kg each | 66Pcs | Tumbled (Profiles Available) | +/- 2mm | +/- 2mm |
| *Rebated 610x406x30/60mm | P3 | 21kg each | 48Pcs | Rebate | +/- 2mm | +/- 2mm |
| *Rebated 610x406x30/80mm | P3 | 27kg each | 48 | Rebate | +/- 2mm | +/- 2mm |
| | | | | | *Rebate has sawn finish on the drop face* | |

# Travertine Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

| VALO - Tumbled Finish | | | | | | |
|---|---|---|---|---|---|---|
| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
| | | | | | Dimension | Thickness |
| **Modular & Irregular** | | | | | | |
| French Pattern 30mm | P3 | 78kg/m² | 15.84m² | Tumbled | +/- 2mm | +/- 2mm |
| French Pattern 12mm | P3 | 31kg/m² | 37.44m² | Tumbled | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| **Step Tread 1220x406x30mm | P3 | 36kg each | 33Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |

***1220 long steps have honed and unfilled finish on top and surface*

# Granite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## AALTO - Flamed Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 191.5 | 15.6 | | 75 | 0.30 | 0.90 | | 31.26 / 14.19 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 81kg/m² | 16.32m² | Sawn | +/- 2mm | +/- 2mm |
| 400x400x30mm | P5 | 81kg/m² | 10.88m² | Sawn | +/- 2mm | +/- 2mm |
| 600x400x12mm | P5 | 32.5kg/m² | 31.20m² | Sawn | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 400x400x30mm | P5 | 13kg each | 68Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| 600x400x30mm | P5 | 19.5kg each | 68Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| *Rebated 600x400x30/80mm | P5 | 22.1kg each | 38Pcs | Rebate | +/- 2mm | +/- 2mm |

## HIGHLAND GREY - Flamed Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 205.7 | 22.2 | | 58.8 | 0.14 | 0.40 | | 27.75 / 10.7 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 87kg/m² | 16.32m² | Sawn | +/- 2mm | +/- 2mm |
| 400x400x30mm | P5 | 87kg/m² | 16.32m² | Sawn | +/- 2mm | +/- 2mm |
| 600x400x12mm | P5 | 35kg/m² | 28.8m² | Sawn | +/- 2mm | +/- 2mm |
| 600x400x12mm | P5 | 35kg/m² | 19.2m² | Sawn | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 400x400x30mm | P5 | 14kg each | 68Pcs | Sawn (Profiles Available | +/- 2mm | +/- 2mm |
| 600x400x30mm | P5 | 21kg each | 68Pcs | Sawn (Profiles Available | +/- 2mm | +/- 2mm |
| *Rebated 600x400x30/80mm | P5 | 23.7kg each | 38Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Mesh Straightbond 90x90x20mm | P5 | 52kg/m² | 24.7m² | Split | +/- 2mm | +/- 2mm |
| Uniform Mesh Brickbond 90x90x20mm | P5 | 52kg/m² | 24.7m² | Split | +/- 2mm | +/- 2mm |

# Granite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

| HIGHLAND GREY - Flamed Finish (Continued) | | | | | | | |
|---|---|---|---|---|---|---|---|
| Size mm | | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
| | | | | | | Dimension | Thickness |
| **Stepping Stones & Treads** | | | | | | | |
| Circular - Medium Ø 600x30mm | | P5 | 20kg each | 25Pcs | Sawn | +/- 2mm | +/- 2mm |
| Circular - Large Ø 800x30mm | | P5 | 35kg each | 40Pcs | Sawn | +/- 2mm | +/- 2mm |
| Rectangular 800x400x30mm | | P5 | 26.8kg each | 35Pcs | Sawn (Profiles Available | +/- 2mm | +/- 2mm |
| Step Tread 1210x400x30mm | | P5 | 35kg each | 50Pcs | Sawn (Profiles Available | +/- 2mm | +/- 2mm |

| RAVEN - Flamed Finish | | | | | | | |
|---|---|---|---|---|---|---|---|
| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
| 141 | 24 | | 47.08 | 0.14 | 0.41 | | 13.48 / 5.38 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 90kg/m² | 16.32m² | Sawn | +/- 2mm | +/- 2mm |
| 400x400x30mm | P5 | 90kg/m² | 10.88m² | Sawn | +/- 2mm | +/- 2mm |
| 600x400x12mm | P5 | 36kg/m² | 28.80m² | Sawn | +/- 2mm | +/- 2mm |
| 400x400x12mm | P5 | 36kg/m² | 19.20m² | Sawn | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P5 | 22kg each | 68Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| *Rebated 610x406x30/80mm | P5 | 25kg each | 38Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Cobblestones** | | | | | | |
| Uniform Mesh Straightbond 90x90x20 | P5 | 52kg/m² | 24.70 m² | Split | +/- 2mm | +/- 2mm |
| Uniform Mesh Brickbond 90x90x20 | P5 | 52kg/m² | 24.70 m² | Split | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Circular - Medium Ø 600x30mm | P5 | 25kg each | 40Pcs | Sawn | +/- 2mm | +/- 2mm |
| Circular - Large Ø 800x30mm | P5 | 44kg each | 25Pcs | Sawn | +/- 2mm | +/- 2mm |
| Rectangular 800x400x30mm | P5 | 28kg each | 34Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |

# Granite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## RAVEN - Flamed Finish (Continued)

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Stepping Stones & Treads (Continued)** | | | | | | |
| Step Tread 1210x400x30mm | P5 | 42kg each | 25Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |

## SABLE - Flamed Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 141 | 24 | | 47.08 | 0.14 | 0.41 | | |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| Uniform Mesh Brickbond 90x90x20 | P5 | 52kg/m² | 24.7m² | Split | +/- 2mm | +/- 2mm |

# Bluestone Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## BLUESTONE - Sawn & Honed Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 132.6 | 21.2 | | 51.7 | 10.7 | 0.6 | | |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Modular & Irregular** | | | | | | |
| Crazy Paving 20mm | P5 | 60kg/m² | 20m² | Sawn | n/a | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Organic - Medium ~600mmx600mmx30mm | P5 | ~32.4kg each | 25Pcs | Raw + Split | +/- 100mm | +/- 2mm |
| Organic - Large ~900mmx500mmx30mm | P5 | ~40.5kg each | 25Pcs | Raw + Split | +/- 100mm | +/- 2mm |

## VIRTAAVA - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 132.6 | 21.2 | | 51.7 | 10.7 | 0.6 | | 12.24 / 4.64 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Pavers & Tiles** | | | | | | |
| 600x400x30mm | P5 | 80kg/m² | 16.32m² | Sawn | +/- 2mm | +/- 2mm |
| 600x400x12mm | P5 | 34kg/m² | 28.80m² | Sawn | +/- 2mm | +/- 2mm |
| **Copings** | | | | | | |
| 600x400x30mm | P5 | 19.2kg each | 68Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| 800x400x30mm | P5 | 27kg each | 34Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| *Rebated 600x400x30/80mm | P5 | 24.3kg each | 38Pcs | Rebate | +/- 2mm | +/- 2mm |
| *Rebated 800x400x20/60mm | P5 | 24.5kg each | 52Pcs | Rebate | +/- 2mm | +/- 2mm |
| **Stepping Stones & Treads** | | | | | | |
| Rectangular 800x400x30mm | P5 | 27kg each | 34Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |
| Step Tread 1210x400x30mm | P5 | 39.4kg each | 25Pcs | Sawn (Profiles Available) | +/- 2mm | +/- 2mm |

# Porphyry Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

| PORPHYRY - Split Finish | | | | | | | |
|---|---|---|---|---|---|---|---|
| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
| 178 | 24 | | 74 | 0.7 | | | 20.76 / 6.94 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Modular & Irregular** | | | | | | |
| Split Crazy Paving 20-40mm | P5 | 90kg/m² | 17.64m² | Split | n/a | n/a |
| **Cobblestones** | | | | | | |
| Split Loose - Cube 100x100x20-60mm | P5 | 100kg/m² | 14.82m² | Split | n/a | n/a |
| Split Loose - Filetti Random Dimensions | P5 | 100kg/m² | 12.5m² | Split | n/a | n/a |

# Natural Quartzite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## ACERO - Split Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 21.15 | 11.84 | | 94 | 0.49 | 1.26 | | 33.73 / 18.54 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones** | | | | | | |
| Split Loose - Cube 100x100x20-40mm | P5 | 81kg/m² | 10.88m² | Split | n/a | n/a |

## CALOR - Split Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 22 | 14.26 | | 94 | 0.3 | 0.8 | | 42.63 / 21.99 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Modular & Irregular** | | | | | | |
| Split Crazy Paving 20-40mm Standard Format | P5 | 72kg/m² | 11m² | Split | n/a | n/a |
| Split Crazy Paving 20-40mm Large Format | P5 | 95kg/m² | 11m² | Split | n/a | n/a |

## HERITAGE - Split Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 72 | 18.9 | | 14.15 | 0.18 | 0.64 | 50 / 43.88 | 34.4 / 19.45 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones** | | | | | | |
| Split Mesh - Brickbond 90x90x20mm | P5 | 45kg/m² | 18.72m² | Split | +/- 4mm | +/- 4mm |

## KALDUR - Split Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| | | | | | | | 20.13 / 7.23 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Modular & Irregular** | | | | | | |
| Split Crazy Paving 20-40mm | P5 | 65kg/m² | 23m² | Split | n/a | n/a |

# Natural Quartzite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## KURO - Split Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| | | | | | | | 22.08 / 9.15 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Modular & Irregular** | | | | | | |
| Split Crazy Paving 20-40mm | P5 | 52kg/m² | 25m² | Split | n/a | n/a |

## MONTREUX - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 141 | 24 | | 19.44 | 0.14 | 0.41 | 44 / 40.59 | 31.91 / 12.32 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones** | | | | | | |
| Split Mesh - Straightbond 90x90x20mm | P5 | 43kg/m² | 19.2m² | Antique | +/- 4mm | +/- 4mm |

## PILVI - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 124 | 12.1 | | 80.51 | 0.51 | 0.84 | 40 / 36.89 | 25.9 / 10.29 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones** | | | | | | |
| Split Mesh - Straightbond 90x90x20mm | P5 | 45kg/m² | 19.2m² | Split | +/- 4mm | +/- 4mm |

## PLUME - Antique Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| 101.6 | 17.2 | | 25.53 | 0.06 | 0.26 | 29 / 27.42 | 23.91 / 12.3 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones** | | | | | | |
| Split Mesh - Straightbond 90x90x20mm | P5 | 45kg/m² | 19.2m² | Split | +/- 4mm | +/- 4mm |

# Natural Quartzite Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

| VARI - Antique Finish | | | | | | | |
|---|---|---|---|---|---|---|---|
| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
| 131 | 19.4 | | 10.91 | 0.1 | 0 | 39 / 36.15 | 35.65 / 25.06 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones** | | | | | | |
| Split Mesh - Straightbond 90x90x20mm | P5 | 45kg/m² | 19.2m² | Split | +/- 4mm | +/- 4mm |

# Slate Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

## ARKKIA - Split Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| | | | 73 | | | | 29.05 / 12.41 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Modular & Irregular** | | | | | | |
| Split Crazy Paving 20-40mm | P5 | 60kg/m² | 20m² | Split | n/a | n/a |
| **Cobblestones** | | | | | | |
| Split Loose - Cube 100x100x20-40mm | P5 | 90kg/m² | 10m² | Split | n/a | n/a |
| Split Loose - Filetti Random Dimensions | P5 | 90kg/m² | 18m² | Split | n/a | n/a |

## ASKA - Split Finish

| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
|---|---|---|---|---|---|---|---|
| | | | 68.33 | | | | |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones** | | | | | | |
| Split Mesh - Brickbond 90x90x20mm | P5 | 52kg/m² | 24.7m² | Split | +/- 2mm | +/- 4mm |

# Terracotta Tech Details

* Please enquire with us to confirm stock availability. Custom sizes are available by order. Weights are indicative only and exclude packaging *

| KOTTA - Antique Finish | | | | | | | |
|---|---|---|---|---|---|---|---|
| Compressive Strength (MPa) | Flexural Strength (MPa) | Salt Resistance (%) | Crystalline Silica (%) | Water Absorption (%) | Open Porosity (%) | Solar Index/ Reflectence (SI) / (%) | LRV Mean Dry/ Mean Wet (Yd) / (Yw) |
| | | | | | | | 31.46 / 23.83 |

| Size mm | Slip Resistence | Weight UOM | Pack Volumes per crate | Edge Finish | Size Tolerance | |
|---|---|---|---|---|---|---|
| | | | | | Dimension | Thickness |
| **Cobblestones** | | | | | | |
| Uniform Loose 305x47x25mm | P5 | 52kg/m² | 15m² | Antique | +/- 5mm | +/- 5mm |

HOUSE OF
bespoke

027 670 0030
info@houseofbespoke.co.nz
houseofbespoke.co.nz